



COLOURANTS



**Phthalocyanine, Azo,
High Performance,
Inorganic Pigments**

www.vibfast.com

Blending illusions into reality

CERTIFICATION

- ISO 9001 : 2015 • ISO 45001 : 2004 • ISO 22000
- EU REACH REGISTERED • UK REACH REGISTERED
- KOREA PRE REGISTERED PRODUCTS • KK DK (TURKEY) PRE REGISTERED PRODUCTS

OUR VISION

- We intend to **create effective on-going business relationship** with our Customers all over the world. We strive to ensure that **our business reflects world-class standards** while representing a unique and fresh approach to doing the business in Pigments & Dyes Industry. We aim to be viewed as **an extension of your professional Organization**.
- To **delight our Customers, Stakeholders and Employees** by consistently manufacturing high quality products through Innovation, Research and Development and by maintaining Global best practices in Quality standards and Safety.

OUR MISSION

- **To be the market leader** in the Pigments & Dyes Industries with a Global perspective by exceeding Customer expectations in Quality and Service, attain operational excellence in Manufacturing, Total Quality Management, Safety & Supply Chain facilitated through our fully compliant state-of-the-art manufacturing plant.

PRODUCTION CAPACITY

- Blue 15.3 : 1800 mt. / Annum
- Blue 15.4 : 600 mt. / Annum
- Blue 15.6 : 240 mt. / Annum
- Blue 15.0/15.1/15.2 : 720 mt. / Annum
- Green 7 : 600 mt. / Annum
- Azo Yellow's : 480 mt. / Annum
- Azo Red's : 480 mt. / Annum
- Chrome Pigments : 1000 mt / Annum
- Ultramarine Pigments : 500 mt / Annum

OUR CORE VALUES

Integrity	For us, Integrity implies honesty, transparency and the highest level of ethical behavior in our business conduct.
Customer First	We treat customers with honesty, respect and dignity. We believe in creating long term relationships with our customer. We always put them first for they are the driving force for our growth and development.
Commitment	We are committed to all our stakeholders by adopting best practices in business operations to honour our deliverables.
Respect for Individual	We are committed to create a work culture that encourage trust in the organisation, respect to an individual and value the diversity in the organization.
Contribute to the society	We believe in our responsibility to create value in society through improvement in health care, education and conserving our environment.

OUR PRIDE

- **EXPORT AWARD** for self manufactured exports of pigments from **GUJARAT DYESTUFFS MANUFACTURERS ASSOCIATION.**


For the year :

2005-06	2006-07	2008-09	2009-10	2010-11	2011-12	2012-13	2013-14	2014-15
2015-16	2016-17	2017-18	2018-19	2019-20	2020-21	2021-22		

SALES TURNOVER

- VIBFAST PIGMENTS has projected a turnover of USD 35 Million for the year 2022-2023.

Sales Turnover (in USD Millions)

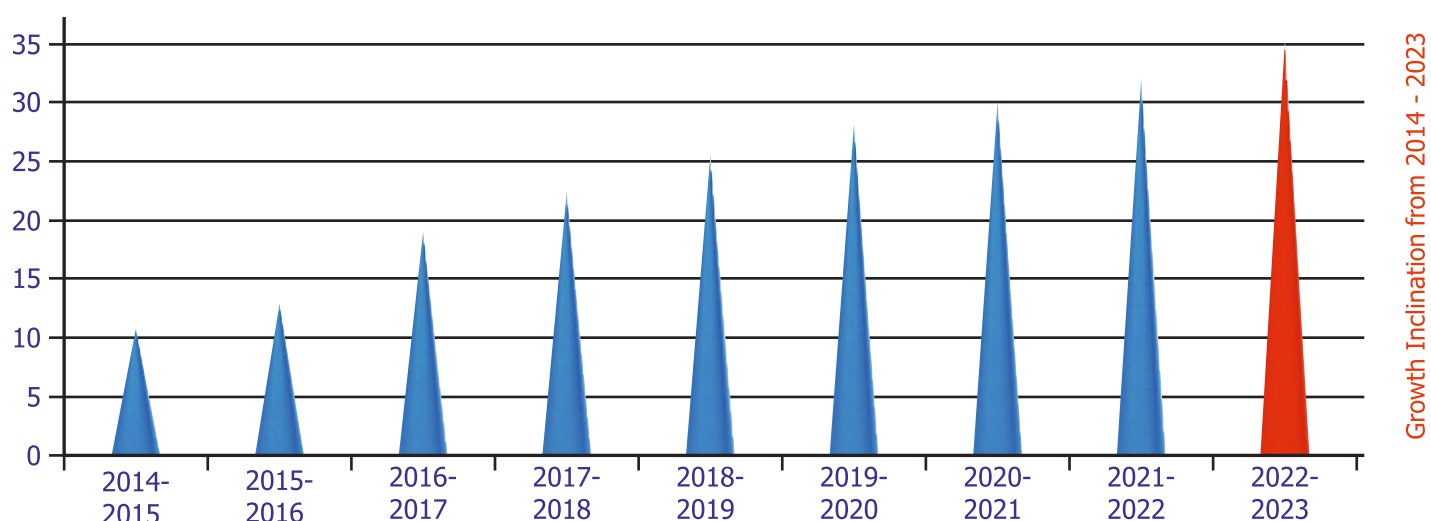

WHY US?

- **Low cost High quality** Products and Services
- **International Standard** Quality and **Consistency** maintained
- **Prompt Dispatch, Excellent Communication and coordination, & Systematic Logistic Services**
- **Available Counter types/ shades** against all the major international brands
- **EXPORT AWARD** for self manufactured exports of pigments from **GUJARAT DYESTUFFS MANUFACTURERS ASSOCIATION**
- **Reach Registered / Pre-registered pigments**
- Pigments are in **compliance with directives issued by various countries** from time to time for Printing Inks, Food Packaging and Toys Applications

PHTHALOCYANINE PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name

C.I. Pigment Blue 15:0

Vibfast Blue 7160-160 : UN

C.I. Pigment Blue 15:1

Vibfast Blue 7060-200 K

C.I. Pigment Blue 15:1

Vibfast Blue 7060-160

C.I. Pigment Blue 15:2

Vibfast Blue 6875 F : UN

C.I. Pigment Blue 15:3

Vibfast Blue L 116

C.I. Pigment Blue 15:3

Vibfast Blue D 2160

C.I. Pigment Blue 15:3

Vibfast Blue D 2160 : HDD

C.I. Pigment Blue 15:3

Vibfast Blue D VP3D4

C.I. Pigment Blue 15:3

Vibfast Blue D VP4D6

C.I. Pigment Blue 15:3

Vibfast Blue D VP4D9

C.I. Pigment Blue 15:3

Vibfast Blue D VP4DX

C.I. Pigment Blue 15:3

Vibfast Blue D 2163:HS

C.I. Pigment Blue 15:3

Vibfast Blue D 2163:C

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.30	≤ 45	7-8	200	5	5	5	L	S	L	S	S	L	S	S	L	L	S
6-7	1.30	≤ 45	7-8	300	5	5	5	N	S	L	S	S	S	S	S	S	S	S
6-7	1.30	≤ 45	7-8	280	5	5	5	L	S	L	S	S	S	S	L	L	L	L
6-7	1.40	≤ 45	7-8	280	5	5	5	N	N	N	S	S	S	S	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	L	S	L	S	S	S	S	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	L	S	L	S	S	S	S	S	S	S	S
6-7	1.30	≤ 45	7-8	280	5	5	5	L	S	L	S	S	S	S	S	S	S	S
6-7	1.30	≤ 45	7-8	280	5	5	5	L	L	S	L	L	L	L	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	L	L	S	L	L	L	L	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	L	L	S	L	L	L	L	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	S	L	S	S	L	S	L	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	S	L	S	L	L	L	L	L	L	L	L
6-7	1.30	≤ 45	7-8	280	5	5	5	S	N	S	N	N	N	N	N	N	N	N

S = Suitable, L = Limited Suitability, N = Not Suitable

PHTHALOCYANINE PIGMENTS




Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name



C.I. Pigment Blue 15:3

Vibfast Blue 2166 : UN

C.I. Pigment Blue 15:3

Vibfast Blue 316 K

C.I. Pigment Blue 15:4

Vibfast Blue D 7150 : GUSH

C.I. Pigment Blue 15:4

Vibfast Blue D 2180-OPTIC

C.I. Pigment Blue 15:4

Vibfast Blue D 2180-IRIS

C.I. Pigment Blue 15:4

Vibfast Blue L 2100 F

C.I. Pigment Blue 15:4

Vibfast Blue K 2100 F : LW

C.I. Pigment Blue 15:6

Vibfast Blue L 6140 F

C.I. Pigment Green 7

Vibfast Green K 4001-I16

C.I. Pigment Green 7

Vibfast Green D 4001-I62

C.I. Pigment Green 7

Vibfast Green L 4001-I60

C.I. Pigment Green 7

Vibfast Green 4001 : UN

C.I. Pigment Green 36

Vibfast Green 4002

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.30	≤ 45	7-8	280	5	5	5	S	S	S	S	S	S	S	S	S	S	S
6-7	1.39	≤ 40	7-8	300	5	5	5	N	S	N	S	S	S	S	S	S	S	S
6-7	1.40	≤ 42	7-8	280	5	5	5	S	L	S	L	L	L	L	L	L	L	L
6-7	1.40	≤ 42	7-8	280	5	5	5	S	L	S	L	L	L	L	L	L	L	L
6-7	1.40	≤ 42	7-8	280	5	5	5	S	L	S	L	L	L	L	L	L	L	L
6-7	1.40	≤ 42	7-8	280	5	5	5	N	N	N	S	S	S	S	N	N	N	N
6-7	1.40	≤ 42	7-8	280	5	5	5	N	N	N	S	S	S	S	N	N	N	N
6-7	1.39	≤ 42	7-8	280	5	5	5	S	N	S	S	S	S	S	S	S	S	S
6-7	1.60	≤ 35	7-8	300	5	5	5	N	N	N	L	L	L	L	S	S	S	S
6-7	1.60	≤ 35	7-8	280	5	5	5	L	S	S	N	N	N	N	N	N	N	N
6-7	1.60	≤ 35	7-8	280	5	5	5	N	N	N	S	S	S	S	L	L	L	L
6-7	1.60	≤ 35	7-8	280	5	5	5	S	S	S	S	S	S	S	S	S	S	S
5-6	1.45	≤ 25	5-6	200	5	5	3	S	S	S	S	S	S	S	S	S	S	S

S = Suitable, L = Limited Suitability, N = Not Suitable

"CLASSICAL" ORGANIC PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name

C.I. Pigment Yellow 1

Vibfast Yellow 4002

C.I. Pigment Yellow 2

Vibfast Yellow 4016

C.I. Pigment Yellow 3

Vibfast Yellow 4003

C.I. Pigment Yellow 5

Vibfast Yellow 4021

C.I. Pigment Yellow 12

Vibfast Yellow 4004

C.I. Pigment Yellow 12

Vibfast Yellow 4004-T

C.I. Pigment Yellow 13

Vibfast Yellow 4005

C.I. Pigment Yellow 13

Vibfast Yellow 4005-T

C.I. Pigment Yellow 14

Vibfast Yellow 4006

C.I. Pigment Yellow 17

Vibfast Yellow 4007

C.I. Pigment Yellow 62

Vibfast Yellow 4011

C.I. Pigment Yellow 65

Vibfast Yellow 4012

C.I. Pigment Yellow 73

Vibfast Yellow 4013

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.25	≤ 45	6-7	150	4-5	4-5	4-5	L	S	L	S	L	L	S	L	L	L	L
6-7	1.55	≤ 45	5-6	150	4-5	4-5	4-5	L	S	L	S	S	L	S	L	L	L	L
6-7	1.55	≤ 45	6-7	150	4-5	4-5	4-5	S	S	L	S	S	L	S	S	L	L	S
6-7	1.30	≤ 45	4-5	150	4-5	4-5	4	L	S	L	S	L	L	S	S	L	L	S
6-7	1.30	≤ 45	4-5	200	5	4-5	4	L	S	L	S	S	L	S	S	S	L	S
6-7	1.30	≤ 45	4-5	160	5	4-55	4	S	L	S	L	L	L	L	L	L	L	L
6-7	1.30	≤ 45	5-6	220	5	5	5	L	S	L	S	S	L	S	S	S	L	S
6-7	1.30	≤ 55	5-6	200	5	5	5	S	L	S	L	L	L	L	L	L	L	L
6-7	1.15	≤ 55	5-6	200	5	5	5	L	S	L	S	S	S	S	S	S	L	S
6-7	1.30	≤ 55	6-7	200	5	4	5	L	S	L	S	S	S	S	S	S	L	S
6-7	1.50	≤ 45	6-7	240	5	4	4	N	N	N	L	L	N	N	S	S	S	S
6-7	1.35	≤ 45	6-7	150	4	5	5	N	L	N	S	S	L	S	N	N	N	N
6-7	1.35	≤ 45	7-8	160	5	5	5	N	S	N	S	S	N	S	N	N	N	N

S = Suitable, L = Limited Suitability, N = Not Suitable

"CLASSICAL" ORGANIC PIGMENTS

 Shades		C. I. No.	Vibfast Product Name
Tint Shades	Full Shades		
		C.I. Pigment Yellow 74	Vibfast Yellow 4008-OP-R
		C.I. Pigment Yellow 74	Vibfast Yellow 4008-TP-G
		C.I. Pigment Yellow 83	Vibfast Yellow 4009
		C.I. Pigment Yellow 83	Vibfast Yellow 4009-T
		C.I. Pigment Yellow 168	Vibfast Yellow 4010
		C.I. Pigment Yellow 183	Vibfast Yellow 4015
		C.I. Pigment Yellow 191	Vibfast Yellow 4014
		C.I. Pigment Yellow 191:1	Vibfast Yellow 4014:1
		C.I. Pigment Red 2	Vibfast Red 4025
		C.I. Pigment Red 3	Vibfast Red 4026
		C.I. Pigment Red 4	Vibfast Red 4027
		C.I. Pigment Red 5	Vibfast Red 4029
		C.I. Pigment Red 8	Vibfast Red 4036

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.30	≤ 45	6-7	180	5	5	5	L	S	L	S	S	S	S	L	N	N	L
6-7	1.30	≤ 45	6-7	160	5	5	5	L	S	L	S	S	S	S	L	N	N	L
6-7	1.30	≤ 55	5-6	220	5	5	5	L	S	S	S	S	S	S	S	S	S	S
6-7	1.30	≤ 55	5-6	220	5	5	5	S	N	S	S	S	N	N	N	N	N	N
6-7	1.40	40-70	5-6	240	5	4	5	N	N	N	L	L	L	L	S	S	S	S
7-8	1.70	40-80	6-7	280	4	4	4	N	N	N	S	S	N	S	N	N	N	N
7-8	1.70	≤ 55	7-8	280	5	5	4-5	N	N	N	N	N	N	N	S	S	S	S
7-8	1.70	≤ 55	7-8	280	5	5	4-5	N	N	N	N	N	N	N	S	S	S	S
6-7	1.30	≤ 50	5-6	200	5	4	4	N	S	N	S	S	S	S	S	S	S	S
6-7	1.30	≤ 50	5-6	180	5	4	4	N	N	N	S	S	S	S	L	L	L	L
6-7	1.20	≤ 50	5-6	180	5	4	4	N	S	N	S	S	N	S	S	N	N	N
7	5.50	35	6-7	180	5	4-5	4-5	N	S	S	S	N	S	S	N	N	N	N
6-7	1.30	≤ 50	5-6	180	5	4	4	S	S	S	S	S	S	S	N	N	N	N

S = Suitable, L = Limited Suitability, N = Not Suitable

"CLASSICAL" ORGANIC PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name

C.I. Pigment Red 12

Vibfast Red 4037

C.I. Pigment Red 21

Vibfast Red 4038

C.I. Pigment Red 22

Vibfast Red 4043

C.I. Pigment Red 23

Vibfast Red 4041

C.I. Pigment Red 31

Vibfast Red 4039

C.I. Pigment Red 38

Vibfast Red 4042

C.I. Pigment Red 48:1

Vibfast Red 4028:1

C.I. Pigment Red 48:2

Vibfast Red 4028:2

C.I. Pigment Red 48:3

Vibfast Red 4028:3

C.I. Pigment Red 48:4

Vibfast Red 4028:4

C.I. Pigment Red 49:1

Vibfast Red 4037:1

C.I. Pigment Red 52:2

Vibfast Red 4042:2

C.I. Pigment Red 53:1

Vibfast Red 4030:1

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.30	≤ 50	6-7	200	5	4	4	S	S	S	S	S	S	S	N	N	N	N
6-7	1.20	≤ 40	5-6	180	4	3	3	N	L	L	S	S	S	S	N	N	N	N
6-7	1.30	45-50	5	160	4	4	4	L	S	L	S	L	L	S	L	L	L	L
6-7	1.30	≤ 55	5-6	150	4	2	2	L	S	S	S	S	S	S	L	L	L	L
6-7	2.00	≤ 55	5-6	150	4	2	2	L	S	S	S	S	S	S	L	L	L	L
6-8	2.00	45-55	6-7	200	1.5	5	5	N	N	N	L	L	L	L	S	S	S	S
6-7	2.00	≤ 50	5-6	220	5	4	4-5	L	L	L	L	L	L	L	S	S	S	S
6-7	1.60	≤ 55	5-6	240	5	3	3	N	S	S	S	S	S	S	S	S	S	S
6-7	1.60	≤ 55	5-6	240	5	3	3	N	S	S	S	S	S	S	S	S	S	S
6-7	1.60	≤ 50	6-7	200	5	3	3	N	S	S	S	S	S	S	L	L	L	L
6-7	1.60	≤ 50	4-5	200	2	3	3	N	S	S	S	S	S	S	S	S	S	N
6-7	1.70	≤ 55	4-5	240	5	3	3	N	S	N	S	S	N	S	N	N	N	N
6-7	1.70	≤ 50	4-5	240	5	3	3	L	S	S	S	S	S	S	S	S	S	L

S = Suitable, L = Limited Suitability, N = Not Suitable

"CLASSICAL" ORGANIC PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name



C.I. Pigment Red 57:1

Vibfast Red 4031



C.I. Pigment Red 57:1

Vibfast Red 4031:W



C.I. Pigment Red 63:1

Vibfast Red 4039:1



C.I. Pigment Red 112

Vibfast Red 4032



C.I. Pigment Red 146

Vibfast Red 4033



C.I. Pigment Red 170

Vibfast Red 4034 F3R



C.I. Pigment Red 170

Vibfast Red 4034 F5R



C.I. Pigment Red 210

Vibfast Red 4035



C.I. Pigment Orange 5

Vibfast Orange 4050



C.I. Pigment Orange 13

Vibfast Orange 4051



C.I. Pigment Orange 34

Vibfast Orange 4052



C.I. Pigment Green 8

Vibfast Green 4070



Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	0.70	≤ 65	4-5	230	5	5	4-5	L	L	L	S	S	S	S	S	S	S	L
6-7	0.70	≤ 65	4-5	230	5	5	4-5	L	S	L	S	S	S	S	S	S	S	S
6-7	1.45	≤ 50	4-5	180	5	4-5	2-3	S	S	S	S	S	S	S	S	S	S	N
6-7	1.45	≤ 50	6-7	180	5	4-5	5	N	S	N	S	S	S	S	N	N	N	N
6-7	1.45	≤ 50	6-7	200	5	4-5	5	S	S	S	S	S	S	S	S	S	N	S
6-7	1.30	≤ 50	6-7	240	5	5	5	N	N	N	S	S	S	S	S	S	S	N
6-7	1.30	≤ 50	6-7	240	5	5	5	N	N	N	S	S	S	S	S	S	S	N
6-7	1.30	≤ 50	6-7	200	5	5	5	N	S	S	S	S	S	S	S	S	S	S
6-5	1.60	≤ 40	5-6	180	4	4-5	4-5	N	S	S	S	S	S	S	L	L	L	L
6-7	1.40	≤ 50	4-5	220	4-5	4-5	4-5	N	S	S	S	S	S	S	S	S	S	S
6-7	1.20	≤ 50	5-6	220	5	4	4	N	S	S	S	S	S	S	S	S	S	S
6-7	1.45	≤ 39	6-7	180	4-5	4-5	4-5	S	S	L	S	S	L	S	S	L	L	S

S = Suitable, L = Limited Suitability, N = Not Suitable

TONER PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name

C.I. Pigment Blue 1

Vibfast Blue 2164

C.I. Pigment Blue 62

Vibfast Blue 2165

C.I. Pigment Violet 1

Vibfast Violet 4059

C.I. Pigment Violet 3

Vibfast Violet 4060

C.I. Pigment Violet 27

Vibfast Violet 4063

C.I. Pigment Red 81:1

Vibfast Red 5001

C.I. Pigment Red 81:3

Vibfast Red 5002

C.I. Pigment Red 169

Vibfast Red 4043

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.30	≤ 45	3-4	150	4	4	3	S	S	S	N	N	N	N	N	N	N	N
6-7	1.30	≤ 45	3-4	150	4	4	3	S	S	S	N	N	N	N	N	N	N	N
6-7	1.30	≤ 45	3-4	150	4	4	3	S	S	S	N	N	N	N	N	N	N	N
6-7	2.10	≤ 50	5-6	160	4	5	4	N	S	S	S	S	S	S	N	N	N	N
6-7	2.10	≤ 25	4-5	160	4	5	5	S	S	S	N	N	N	N	N	N	N	N
6-7	1.60	≤ 45	3-4	150	4	4	3	N	S	S	S	S	S	S	N	N	N	N
6-7	1.60	≤ 45	3-4	150	4	4	3	N	S	S	S	S	S	S	N	N	N	N
6-7	1.30	≤ 45	3-4	150	4	4	3	S	S	S	N	N	N	N	N	N	N	N

S = Suitable, L = Limited Suitability, N = Not Suitable

INORGANIC PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name



C.I. Pigment Yellow 34

Vibfast Middle Chrome 4071



C.I. Pigment Yellow 34

Vibfast Lemon Chrome 4072



C.I. Pigment Yellow 34

Vibfast Prime Rose Chrome 4073



C.I. Pigment Red 104

Vibfast Scarlet Chrome 4074



C.I. Pigment Yellow 34

Vibfast Middle Chrome 4071-Eco



C.I. Pigment Yellow 34

Vibfast Lemon Chrome 4072-Eco



C.I. Pigment Yellow 34

Vibfast Prime Rose Chrome 4073-Eco



C.I. Pigment Red 104

Vibfast Scarlet Chrome 4074-Eco



C.I. Pigment Yellow 36

Vibfast Zinc Chrome 4076



C.I. Pigment Yellow 32

Vibfast Strontium Chromate 4078



C.I. Pigment Blue 29

Vibfast Ultramarine Blue 2900



C.I. Pigment Violet 15

Vibfast Ultramarine Violet



Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-8	5.50	≤ 29	5-6	220	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	5.20	≤ 26	5-6	220	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	5.10	≤ 30	5-6	220	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	5.90	≤ 22	5-6	220	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	4.90	≤ 35	5	200	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	4.90	≤ 35	5	200	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	4.90	≤ 35	5	200	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-8	4.90	≤ 35	5	200	5	5	5	L	S	S	S	S	L	S	S	S	S	L
6-7	5.50	≤ 35	4-5	250	5	5	4	N	N	N	S	S	N	N	S	S	S	S
6-8	0.50-0.70	20-30	6-7	170-180	2-3	2-3	2-3	N	N	N	S	S	S	S	N	N	N	N
5-6	1.50	≤ 23	4-5	350	2	2	3	S	N	N	S	S	S	S	S	S	S	S
6-8	0.50	34-37	5-6	350	4-5	4-5	4-5	N	N	N	S	S	S	S	S	S	S	S

S = Suitable, L = Limited Suitability, N = Not Suitable

MIXED METAL OXIDES



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name



C.I. Pigment Yellow 184

Vibfast Bismuth Vanadate Yellow 4077



C.I. Pigment Yellow 53

Vibfast Nickel Antimony Titanate Yellow 4086



C.I. Pigment Brown 24

Vibfast Chrome Antimony Titanium Brown 4080



C.I. Pigment Cobalt Green 50

Vibfast Cobalt Titanate Green 4081



C.I. Pigment Black 28

Vibfast Copper Chromite Black 4082



C.I. Pigment Black 26

Vibfast Chrome Iron Nickel Black 4083



C.I. Pigment Cobalt Blue 28

Vibfast Cobalt Blue 4079



C.I. Pigment Cobalt Blue 36

Vibfast Cobalt Chrome Blue 4084



C.I. Pigment Yellow 164

Vibfast Manganese Antimony Titanium Buff 4085



C.I. Pigment Yellow 216

Vibfast Tan Zinc Yellow 4086



C.I. Pigment Yellow 119

Vibfast Zinc Ferrite Yellow 4087



Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
7-8	2.20	≤ 35	7-8	200	5	5	5	N	N	N	S	S	S	S	N	N	N	N
7-9	0.7-0.8	20	8	800	1	5	5	N	N	N	S	S	S	S	S	S	S	S
6-8	0.75-0.85	20	8	800	1	5	5	N	N	N	S	S	S	S	S	S	S	S
8-9	0.65-0.75	20	8	700	1	5	5	N	N	N	S	S	S	S	S	S	S	S
6-7	5.2	20	8	800	1	5	5	N	N	N	S	S	S	S	S	S	S	S
7-8	5	≤ 22	8	300	0.5	5	5	N	N	N	S	S	S	S	S	S	S	S
8-9	0.7	25-35	5-6	800	4-5	4-5	4-5	N	N	N	S	S	S	S	S	S	S	S
7-8	0.6-0.7	20	8	800	1	5	5	N	N	N	S	S	S	S	S	S	S	S
6-8	0.6-0.8	20	8	800	1	5	5	N	N	N	S	S	S	S	S	S	S	S
7-8	0.8	18	8	320	1	5	5	N	N	N	S	S	S	S	S	S	S	S
8-9	0.8	25-35	5.2	320	1	5	5	N	N	N	S	S	S	S	S	S	S	S

S = Suitable, L = Limited Suitability, N = Not Suitable

HIGH PERFORMANCE PIGMENTS



Tint Shades

Full Shades

C. I. No.

Vibfast
Product Name

C.I. Pigment Yellow 138

Vibfast Isoindolinone Yellow 4206

C.I. Pigment Yellow 139

Vibfast Isoindolinone Yellow 4200

C.I. Pigment Yellow 151

Vibfast Bezimidazolone Yellow 4201

C.I. Pigment Yellow 154

Vibfast Bezimidazolone Yellow 4202

C.I. Pigment Yellow 155

Vibfast Bezimidazolone Yellow 4203

C.I. Pigment Yellow 180

Vibfast Bezimidazolone Yellow 4204

C.I. Pigment Orange 16

Vibfast Bisacetoacetarylide Orange 4300

C.I. Pigment Orange 36

Vibfast Bisacetoacetarylide Orange 4301

C.I. Pigment Orange 64

Vibfast Orange 4304

C.I. Pigment Violet 19

Vibfast Quinacridone Violet 4061

C.I. Pigment Violet 23-BL

Vibfast Carbazole Violet 4062:BL

C.I. Pigment Violet 23-RL

Vibfast Carbazole Violet 4062:RL

Physical Data			Fastness Properties					Recommended Applications										
								Ink			Paint				Plastic			
pH Value	Density	Oil Absorption	Light Fastness	Heat Resistance	Water Resistance	Acid Resistance	Alkali Resistance	Offset Ink	Water-based Ink	Solvent-based Ink	Industrial Paint	Powder Coating	Auto Paint	Water-based Paint	PVC	PP	PS / ABS	EVA / Rubber
6-7	1.75	≤ 55	7-8	260	4	5	4	S	S	S	S	S	S	S	S	S	S	L
6-7	1.75	≤ 55	7-8	260	4	5	4	S	S	S	S	S	S	S	S	S	S	L
7-8	1.50	≤ 50	7-8	260-280	5	5	4	S	S	S	S	S	S	S	S	S	S	S
7-8	1.50	≤ 55	7-8	260-280	5	5	5	N	N	N	S	S	S	S	N	N	N	N
6-7	1.40	≤ 55	6-7	260-280	5	5	5	N	S	S	S	S	S	S	S	S	S	S
7-8	1.40	≤ 55	7-8	300	5	5	5	S	S	S	S	S	L	S	S	S	S	S
6-7	1.30	≤ 50	6-7	240	5	4	4	S	S	S	S	S	S	S	S	S	S	L
7-8	1.50	≤ 40	7-8	250	5	4	5	N	S	S	S	S	S	S	L	L	L	L
7-8	1.60	≤ 45	7-8	280-300	5	5	5	N	S	S	S	S	S	S	S	S	S	L
7-8	1.50	≤ 55	7-8	260	5	5	5	S	S	S	S	S	S	S	S	S	S	S
7-8	1.50	≤ 50	7-8	280	5	5	5	S	S	S	S	S	S	S	S	S	S	S
7-8	1.50	≤ 50	7-8	280	5	5	5	S	S	S	S	S	S	S	S	S	S	S

S = Suitable, L = Limited Suitability, N = Not Suitable

HIGH PERFORMANCE PIGMENTS

 Shades		C. I. No.	Vibfast Product Name
Tint Shades	Full Shades		
		C.I. Pigment Red 122	Vibfast Quinacridone Red 4040
		C.I. Pigment Red 254	Vibfast DPP Red 4600
		C.I. Pigment Red 264	Vibfast DPP Red 460I
			
			
			
			
			
			
			
			
			
			



MANUFACTURERS AND EXPORTERS OF COLOURANTS

Corporate Office : "PALLADIUM", B1/801-806, 8th Floor, B/h. Divya Bhaskar Press,
Nr. Vodafone House, Corporate Road, Prahladnagar, Ahmedabad - 380 015. Gujarat, INDIA.

Phone : +91 - 79 - 2970 5063, +91 - 90990 57223 / 24 | **E-mail :** amit@vibfast.com

Website : www.vibfast.com

VIBFAST PIGMENTS PVT. LTD.

C-1, 91/6, Phase - I, B/h. Bank of India, G.I.D.C., Vatva, Ahmedabad - 382 445. (INDIA)
Phone : +91 - 79 - 3292 0774, 2583 0667

UNIT - I

Plot No. 4606, Phase - IV, B/h. INDO German Tool Room,
G.I.D.C., Vatva, Ahmedabad - 382 445. (INDIA)
Phone : +91 - 79 - 6512 3423

UNIT - II

Plot No. C-1/271/1, Phase - II,
G.I.D.C., Vatva, Ahmedabad - 382 445. (INDIA)
Phone : +91 - 79 - 6512 3422

UNIT - III

Paiki - I & II, Survey No. 141/4/3,
B/h. Ambuja Synthetics Mills, Narol Court Lane,
Narol Village, Ahmedabad - 382 405. (INDIA)

UNIT - IV

Plot No. C-146/1, Sayakha Industrial Estate,
Ta. Amod, Dist. Bharuch - 392 140. (INDIA)

VIBFAST PIGMENTS

Revenue Survey No. 110/1 & 110/2,
B/h. Ambuja Synthetics Mills, Narol Court Lane,
Narol Village, Ahmedabad - 382 405. (INDIA)